



Familiar Comfortworx® Tile

|                      |             |  |
|----------------------|-------------|--|
| Stijlnummer          | C006W       |  |
| Collectie            | Haven       |  |
| Producttype          | Tapijttegel |  |
| Construction         | Standard    | Data + Performance   |
| Type Fabricage       | ISO 2424    | tufted 1/10"   39.4 per 10cm   |
| Uitzicht             | ISO 2424    | Multilevel-Patroonlus  |
| Verfmethode          | EN 994      | 100% In Oplossing Geverfd  |
| Productformaat       | EN 994      | 25 cm x 100 cm   12 tiles (3 m²) per box                             |
| Primaire Backing     | ISO 2424    | Pet Nonwoven   |
| Secundaire Backing   | ISO 2424    | Comfortworx® Tegel   Matrix Padlaag Bevat 90% Gerecycleerd Materiaal |
| Vezel                | ISO 2424    | Ecosolution Q® Polyamide 6   |
| Totale Dikte         | ISO 1765    | 12.3 mm  |
| Afgewerkte Pooldikte | ISO 1766    | 3.5 mm   |
| Totale Massa         | ISO 8543    | 4404 g/m²  |
| Getuft Gewicht       | ISO 2424    | 949 g/m²   |
| Effectieve Poolmassa | ISO 8543    | 394 g/m²   |
| Pooldichtheid        | ISO 8543    | 0.113 g/cm³  |

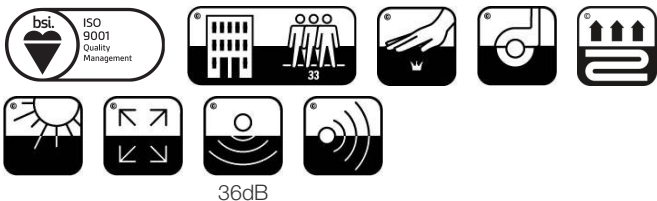


Gegevens

|                                  |               |                            |
|----------------------------------|---------------|----------------------------|
| Steken                           | ISO 1763      | 129,000/m²   32.8 per 10cm |
| Elektrostatische Weerstand       | ISO 6356      | ≤ 2.0 kv (Stroll Test)     |
| Gebruik Classificatie            | EN 1307       | 33 Commercial Heavy        |
| Luxeklasse                       | EN 1307       | LC1                        |
| Dimensionale Stabiliteit         | EN 986        | ≤ 0.2%                     |
| Contactgeluidsisolatie           | ISO 10140     | 36db                       |
| Geluidsabsorptieclassificatie    | ISO 354/11654 | 0.35 Aw   Class D          |
| Warmteweerstand m² K/w           | ISO 8302      | 0.166 M² K/W Tog 0.46      |
| Weerstand Tegen Droog Uitglijden | ISO 13893     | Pass / No Pulled Loops     |
| Kleurvastheid Voor Licht         | ISO 105-B02   | >6                         |
| Ontvlambaarheid                  | EN 13501-1    | Bfl-S1 (Adhered Testing)   |
| Stoel Met Wieltjes               | EN 985        | ≥2.4 Continuous Use        |

15 Jaar Commercieel Beperkt subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

Aanbevolen Installatiemethode



**CE**  
20

EU.DOP/2895/CPR/0820/1020/BT  
OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905  
BL NETHERLANDS (NLD)  
Notified Body 2895

**UK**  
**CA**  
22

UK.DOP/0338/CPR/0820/1020/BT  
SHAW EUROPE LIMITED BLACKADDIE RD,  
SANQUHAR DG4 6DB, UNITED KINGDOM  
Approved Body 0338

**E1**  
HCHO

**Bfl-s1**

**DS**

EN14041:2004/AC:2006  
For use as an indoor floor covering as specified by the manufacturer

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

Coördinerende Producten

Carpet Tile: **Honest Comfortworx® Tile, Identity Comfortworx® Tile, Honest Taskworx® Tile, Identity Taskworx® Tile, Familiar Taskworx® Tile**

Kenmerken + Certificeringen

|   |   |
|---|---|
| Declaration of Performance              | EU.DOP/2895/CPR/0820/1020/BT  |
| Environmental Product Declaration (EPD) | 3de Partij Gecertificeerd in Overeenstemming Met ISO14044, ISO14025 & EN15804 |
| milieugarantie                          | Take Back Policy Offered For All Comfortworx Products                         |
| ISO 9001                                | Gecertificeerd  |
| land van herkomst                       | Verenigd Koninkrijk   |
| BREEAM Contribution Credit              | Certificate of Approval<br>Schools/Offices/Health/Industrial Shed<br>Retail   |

Well V2 Contribution Credit

|  |   |
|--|---|
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization | M1> Emissions Class For Building Material |
|--|---|

Groen Leed Bijdragekrediet

|  |   |
|--|---|
| "MR-krediet: openbaarmaking en optimalisering van bouwproducten<br>Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)" | 3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804 |
| "MR-krediet: Openbaarmaking en optimalisering van bouwproducten<br>MateriaalIngrediënten - Optie 1: Rapportage materiaalIngrediënten"  | HPD ( Version 2.1 )   |













Air Quality

|                         |           |
|-------------------------|-----------|
| Indoor Air Comfort Gold | Certified |
| M1                      | Certified |

Memberships

|                                 |                                 |
|---------------------------------|---------------------------------|
| WGBC Framework                  | WGBC Framework                  |
| UKGBC                           | UKGBC                           |
| Emirates Green Building Council | Emirates Green Building Council |
| Chemsec                         | Chemsec                         |

Lichtreflectiewaarde

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Golden 35210<br>LRV 29.7   L* 61.42  | Mint 35327<br>LRV 21.8   L* 53.81   | Ivy 35375<br>LRV 15.7   L* 46.61  | Overdye 35496<br>LRV 8   L* 34   | Raven 35505<br>LRV 8.1   L* 34.26   | Greige 35516<br>LRV 36.9   L* 67.23   |
|  |  |  |  |  |  |
| Fog 35518<br>LRV 15.6   L* 46.51   | Rainstorm 35535<br>LRV 15.9   L* 46.87  | Espresso 35585<br>LRV 10.7   L* 39.15   | Apricot 35675<br>LRV 19.4   L* 51.1  | Truffle 35760<br>LRV 12.3   L* 41.77  | Rosewood 35870<br>LRV 14.2   L* 44.46   |

Aanvullende Informatie

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[15 jaar commercieel beperkt](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.

