



Identity Comfortworx® Tile

|                          |             |  |
|--------------------------|-------------|--|
| Style Number             | C007W       |  |
| Collection               | Haven       |  |
| Product Type             | Carpet Tile |  |
| Construction             | Standard    | Data + Performance   |
| Type of Manufacture      | ISO 2424    | tufted 1/10"   39.4 per 10cm                                       |
| Aspect                   | ISO 2424    | Multi-Level Pattern Loop   |
| Dye Method               | EN 994      | 100% Solution Dyed   |
| Dimensions               | EN 994      | 25 cm x 100 cm   12 tiles (3 m²) per box                           |
| Primary Backing          | ISO 2424    | Pet Non-Woven  |
| Secondary Backing        | ISO 2424    | Comfortworx® Tile   Matrix Pad Layer Contains 90% Recycled Content |
| Pile Fibre Composition   | ISO 2424    | Eco Solution Q® Polyamide 6  |
| Total Thickness          | ISO 1765    | 12.3 mm  |
| Effective Pile Thickness | ISO 1766    | 3.5 mm   |
| Total Mass               | ISO 8543    | 4404 g/m²  |
| Nominal Total Pile Mass  | ISO 2424    | 949 g/m²   |
| Effective Pile Mass      | ISO 8543    | 394 g/m²   |
| Pile Density             | ISO 8543    | 0.113 g/cm³  |

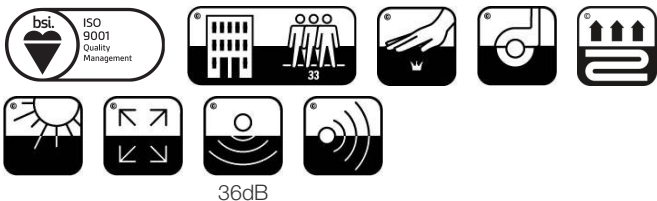


Performance

|                                 |               |                            |
|---------------------------------|---------------|----------------------------|
| Number of Tufts                 | ISO 1763      | 129,000/m²   32.8 per 10cm |
| Electrostatic Propensity        | ISO 6356      | ≤ 2.0 kv (Stroll Test)     |
| Use Classification              | EN 1307       | 33 Commercial Heavy        |
| Luxury Class                    | EN 1307       | LC1                        |
| Dimensional Stability           | EN 986        | ≤ 0.2%                     |
| Impact Sound Insulation         | ISO 10140     | 36db                       |
| Sound Absorption Classification | ISO 354/11654 | 0.35 Aw   Class D          |
| Thermal Resistance m² K/W       | ISO 8302      | 0.166 M² K/W Tog 0.46      |
| Dry Slip Resistance             | ISO 13893     | Pass / No Pulled Loops     |
| Colour Fastness To Light        | ISO 105-B02   | >6                         |
| Flammability                    | EN 13501-1    | Bfl-S1 (Adhered Testing)   |
| Castor Chair                    | EN 985        | ≥2.4 Continuous Use        |

15 Year Commercial Limited Warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

Recommended Installation Method



**CE**  
20

EU.DOP/2895/CPR/0820/1020/BT  
OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905  
BL NETHERLANDS (NLD)  
Notified Body 2895

**UK**  
CA  
22

UK.DOP/0338/CPR/0820/1020/BT  
SHAW EUROPE LIMITED BLACKADDIE RD,  
SANQUHAR DG4 6DB, UNITED KINGDOM  
Approved Body 0338

**E1**  
HCHO

**Bfl-s1**

**DS**

EN14041:2004/AC:2006  
For use as an indoor floor covering as specified by the manufacturer

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

Coordinating Products

Carpet Tile: **Honest Comfortworx® Tile, Familiar Comfortworx® Tile, Honest Taskworx® Tile, Identity Taskworx® Tile, Familiar Taskworx® Tile**

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. ComfortWorx® products are Cradle to Cradle Certified® Bronze and assessed for impacts on human health and the environment. This product can be recycled. When it's time to replace, we can collect through our re-[TURN] scheme in EMEA.

Material Health & Environmental Certifications

|   |  |
|---|--|
| Declaration of Performance              | <b>EU.DOP/2895/CPR/0820/1020/BT</b>  |
| Environmental Product Declaration (EPD) | <b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b>       |
| Environmental Guarantee*                | <b>Take Back Policy Offered For All Comfortworx Products</b>                         |
| ISO 9001                                | <b>Certified</b>   |
| Country of Origin**                     | <b>United Kingdom</b>  |
| BREEAM Contribution Credit              | <b>Certificate of Approval<br/>Schools/Offices/Health/Industrial Shed<br/>Retail</b> |

WELL V2 Contribution Credit

|  |   |
|--|---|
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization | <b>M1&gt; Emissions Class For Building Material</b> |
|--|---|

Leed v4 Contribution Credits

|   |  |
|---|--|
| MR Credit: Building Product Disclosure and Optimization<br>Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | <b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b> |
| MR Credit: Building Product Disclosure and Optimization<br>Material Ingredients - Option 1: Material Ingredient Reporting                         | <b>HPD ( Version 2.1 )</b>   |
| EQ Credit: Low Emitting Materials<br>Option 1: Product Category Calculations  | <b>Certified</b>   |













Air Quality

|                         |                  |
|-------------------------|------------------|
| Indoor Air Comfort Gold | <b>Certified</b> |
| M1                      | <b>Certified</b> |

Memberships

|                                 |  |
|---------------------------------|--|
| WGBC Framework                  | <b>WGBC Framework</b>                  |
| UKGBC                           | <b>UKGBC</b>                           |
| Emirates Green Building Council | <b>Emirates Green Building Council</b> |
| Chemsec                         | <b>Chemsec</b>                         |

Light Reflectance Value

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Golden 35210<br>LRV 23.3   L* 55.33  | Mint 35327<br>LRV 17.9   L* 49.38   | Ivy 35375<br>LRV 15.4   L* 46.19  | Overdye 35496<br>LRV 11.4   L* 40.29   | Raven 35505<br>LRV 8.4   L* 34.8  | Greige 35516<br>LRV 32.5   L* 63.76   |
|  |  |  |  |  |  |
| Fog 35518<br>LRV 18.8   L* 50.42   | Rainstorm 35535<br>LRV 14.9   L* 45.54  | Espresso 35585<br>LRV 10.9   L* 39.37   | Apricot 35675<br>LRV 18.9   L* 50.53   | Truffle 35760<br>LRV 12.5   L* 41.93  | Rosewood 35870<br>LRV 20   L* 51.89   |

Additional Information

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[15 Year Commercial Limited warranty](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.

