



Landing Edge Comfortworx® Tile

|                          |                 |  |
|--------------------------|-----------------|--|
| Style Number             | C033W           |  |
| Collection               | Shifting Fields |  |
| Product Type             | Carpet Tile     |  |
| Construction             | Standard        | Data + Performance   |
| Type of Manufacture      | ISO 2424        | tufted 1/10"   39.4 per 10cm                                       |
| Aspect                   | ISO 2424        | Multi-Level Pattern Loop   |
| Dye Method               | EN 994          | 100% Solution Dyed   |
| Dimensions               | EN 994          | 50 cm x 50 cm   12 tiles (3 m²) per box                            |
| Primary Backing          | ISO 2424        | Pet Non-Woven  |
| Secondary Backing        | ISO 2424        | Comfortworx® Tile   Matrix Pad Layer Contains 90% Recycled Content |
| Pile Fibre Composition   | ISO 2424        | Eco Solution Q100™ Polyamide 6   Contains 100% Recycled Content    |
| Total Thickness          | ISO 1765        | 11.8 mm  |
| Effective Pile Thickness | ISO 1766        | 2.4 mm   |
| Total Mass               | ISO 8543        | 5157 g/m²  |
| Nominal Total Pile Mass  | ISO 2424        | 746 g/m²   |
| Effective Pile Mass      | ISO 8543        | 286 g/m²   |
| Pile Density             | ISO 8543        | 0.119 g/cm³  |



Performance

|                                 |               |                             |
|---------------------------------|---------------|-----------------------------|
| Number of Tufts                 | ISO 1763      | 120,000/m²   30.5 per 10 cm |
| Electrostatic Propensity        | ISO 6356      | ≤ 2.0 kv (Stroll Test)      |
| Use Classification              | EN 1307       | 33 Commercial Heavy         |
| Luxury Class                    | EN 1307       | LC1                         |
| Dimensional Stability           | EN 986        | ≤ 0.2%                      |
| Impact Sound Insulation         | ISO 10140     | 35db*                       |
| Sound Absorption Classification | ISO 354/11654 | 0.30 Aw   Class D           |
| Thermal Resistance m² K/W       | ISO 8302      | 0.165 M² K/W Tog 1.65       |
| Dry Slip Resistance             | ISO 13893     | Pass / No Pulled Loops      |
| Colour Fastness To Light        | ISO 105-B02   | >6                          |
| Flammability                    | EN 13501-1    | Bfl-S1 (Adhered Testing)    |
| Castor Chair                    | EN 985        | ≥2.4 Continuous USE         |

15 Year Commercial Limited Warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.


Recommended Installation Method




Monolithic



Quarter Turn



Random

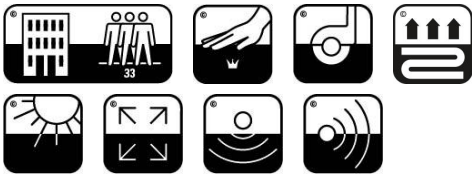

35dB

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

Coordinating Products

Carpet Tile: **Landing Comfortworx® Tile, Plains Comfortworx® Tile, Landing Edge Taskworx® Tile, Landing Taskworx® Tile, Plains Taskworx® Tile**

Material Health & Environmental Certifications

|                                  |   |
|----------------------------------|---|
| Embodied Carbon (Cradle to Gate) | 4.78 kg CO <sub>2</sub> /m <sup>2</sup>                                     |
| Life-Cycle Carbon Emissions      | Carbon Neutral  |
| Country of Origin**              | United Kingdom  |
| BREEAM Contribution Credit       | Certificate of Approval<br>Schools/Offices/Health/Industrial Shed<br>Retail |


Air Quality

|                         |           |
|-------------------------|-----------|
| Indoor Air Comfort Gold | Certified |
| M1                      | Certified |

Memberships

|                                 |                                 |
|---------------------------------|---------------------------------|
| WGBC Framework                  | WGBC Framework                  |
| UKGBC                           | UKGBC                           |
| Emirates Green Building Council | Emirates Green Building Council |
| Chemsec                         | Chemsec                         |

Available Colorways

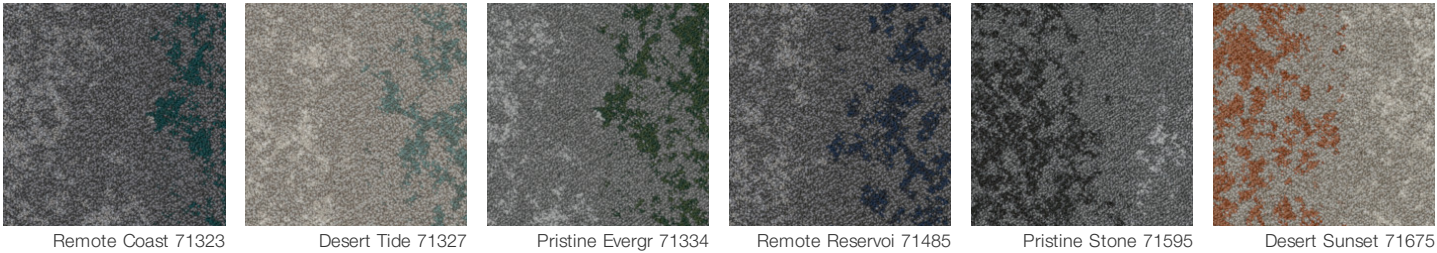

E8031 E8031

Additional Information

|                                     |   |
|-------------------------------------|---|
| 15 Year Commercial Limited warranty | Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.<br><br>This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.<br><br>Visit <a href="https://shawcontract.com/testing">shawcontract.com/testing</a> for more information. |
|-------------------------------------|---|

