


|                                  |               |                          |
|----------------------------------|---------------|--------------------------|
| Steken                           | ISO 1763      | 193,000/m²   41 per 10cm |
| Elektrostatische Weerstand       | ISO 6356      | ≤ 2.0 kv (Stroll Test)   |
| Gebruik Classificatie            | EN 1307       | 33 Commercial Heavy      |
| Luxeklasse                       | EN 1307       | LC1                      |
| Dimensionale Stabiliteit         | EN 986        | ≤ 0.2%                   |
| Contactgeluidsisolatie           | ISO 10140     | 37db                     |
| Geluidsabsorptieclassificatie    | ISO 354/11654 | 0.30 Aw   Class D        |
| Warmteweerstand m² K/w           | ISO 8302      | 0.167 M² K/W Tog 1.67    |
| Weerstand Tegen Droog Uitglijden | ISO 13893     | Pass / No Pulled Loops   |
| Kleurvastheid Voor Licht         | ISO 105-B02   | >6                       |
| Ontvlambaarheid                  | EN 13501-1    | Bfl-S1 (Adhered Testing) |
| Stoel Met Wielties               | EN 985        | ≥2.4 Continuous USE      |

## Aanbevolen Installatiemethode

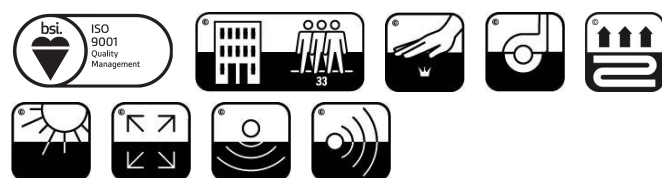

1 of 3

Coördinerende Producten

Carpet Tile: **Stone Comfortworx® Tile, Fragment Comfortworx® Tile, Fragment Colours Comfortworx® Tile, Stone Colours Comfortworx® Tile, Formation Comfortworx® Tile, Fragment Taskworx® Tile, Stone Taskworx® Tile, Formation Colours Ecoworx S Tile, Fragment Colours Ecoworx S Tile, Formation Colours Taskworx® Tile, Fragment Colours Taskworx® Tile, Fragment Ecoworx S Tile, Stone Ecoworx S Tile, Formation Taskworx® Tile, Formation Ecoworx S Tile, Stone Colours Taskworx® Tile, Stone Colours Ecoworx® S Tile**

Kenmerken + Certificeringen

|   |  |
|---|--|
| Environmental Product Declaration (EPD) | <b>3de Partij Gecertificeerd in Overeenstemming Met ISO14044, ISO14025 &amp; EN15804</b> |
| milieugarantie                          | <b>Take Back Policy Offered For All Comfortworx Products</b>                             |
| ISO 9001                                | <b>Gecertificeerd</b>  |
| land van herkomst                       | <b>Verenigd Koninkrijk</b>   |
| BREEAM Contribution Credit              | <b>Certificate of Approval<br/>Schools/Offices/Health/Industrial Shed<br/>Retail</b>     |

Well V2 Contribution Credit

|  |   |
|--|---|
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization | <b>M1&gt; Emissions Class For Building Material</b> |
|--|---|







Groen Leed Bijdragekrediet

|  |  |
|--|--|
| "MR-krediet: openbaarmaking en optimalisering van bouwproducten<br>Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)" | <b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b> |
| "MR-krediet: Openbaarmaking en optimalisering van bouwproducten<br>MateriaalIngrediënten - Optie 1: Rapportage materiaalIngrediënten"  | <b>HPD ( Version 2.1 )</b>   |

Memberships


|                                 |  |
|---------------------------------|--|
| WGBC Framework                  | <b>WGBC Framework</b>                  |
| UKGBC                           | <b>UKGBC</b>                           |
| Emirates Green Building Council | <b>Emirates Green Building Council</b> |
| Chemsec                         | <b>Chemsec</b>                         |

Lichtreflectiewaarde


|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Oatmeal 04111<br>LRV 26.9   L* 58.91   | Brushed Gold 04210<br>LRV 20.8   L* 52.78   | Mineral 04327<br>LRV 18.5   L* 50.09  | Racing Green 04334<br>LRV 5.5   L* 28.23   | Sage 04375<br>LRV 17.4   L* 48.8  | Midnight Sage 04376<br>LRV 6.3   L* 30.22   |

ShawContract®


Formation Colours Comfortworx® Tile




Sky 04411  
LRV 18.8 | L\* 50.51




Midnight Sky 04412




Steel Blue 04447  
LRV 12 | L\* 41.21




Denim 04486  
LRV 4.8 | L\* 26.26




Apricot 04675  
LRV 20.2 | L\* 52.09



Powder Pink 04800  
LRV 25.5 | L\* 57.57



Copper 04865  
LRV 9.8 | L\* 37.41



Rosewood 04870  
LRV 12.6 | L\* 42.16

Aanvullende Informatie

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[15 jaar commercieel beperkt](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

