

## Varietal 12X24 Matte

Style Number	<b>CT02K</b>
Composition	<b>Porcelain</b>
Tile Type	<b>Floor</b>
Body Type	<b>Glazed Color Body Porcelain</b>
Finish	<b>Matte</b>
Tile Size	<b>11.75" x 23.75"   29.85 cm x 60.33 cm</b>
Overall Thickness	<b>0.314"   8 mm</b>
Edge Profile	<b>Rectified</b>
Country Of Origin	<b>United States</b>
Installation Area	<b>Exteriors, Floors, Walls</b>

### Packaging

Actual Dimensions	<b>11.75" x 23.75"   29.85 cm x 60.33 cm</b>
Pieces per Carton	<b>8</b>
Area per Carton	<b>15.5 sq ft   1.44 sq m</b>
Weight per Carton	<b>58.07 lbs   26.34 kg</b>


### Performance + Testing

Shade Variation	<b>V2</b>
Breaking Strength	<b>≥ 250 lbs</b>
Water Absorption %	<b>≤ 0.50% (Impervious (Porcelain))</b>
DCOF	<b>≥ 0.42</b>

### Warranties

[1 Year Commercial Limited Warranty](#)

### Available Colorways

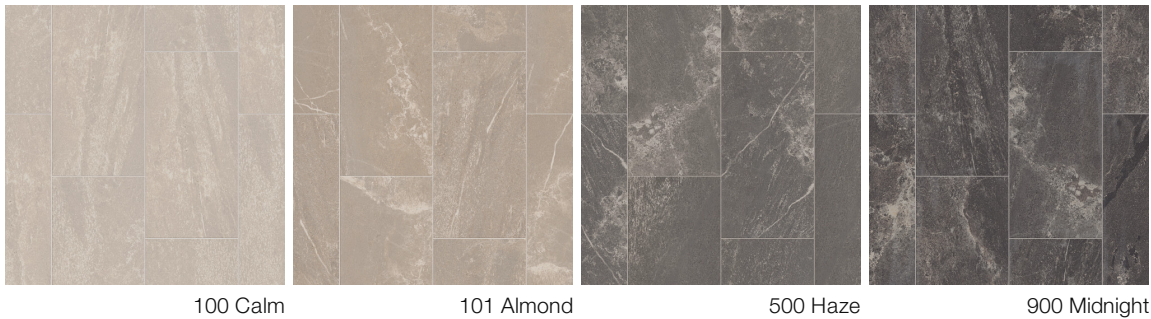

### Additional Information

---

A DCOF value of  $\geq 0.42$  is the standard for tiles specified for commercial applications as stated in standard ANSI 326.3. For more information, visit the Tile Council of North America's website: [www.tcnatile.com](http://www.tcnatile.com)

Tiles with a DCOF value less than 0.42 are not recommended for use in areas with wet or slippery conditions.

Water, oil, grease and other contaminants can create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

Not for use on ramps.

Since there are variations in all fired ceramic and porcelain products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

