

ShawContract®

Stellar 2 X 2 Mosaic Matte

Style Number	CT84K
Composition	Porcelain
Tile Type	Mosaic
Body Type	Colorbody Glazed Porcelain
Finish	Matte
Nominal Dimensions	12" x 12" 30.48 cm x 30.48 cm
Actual Dimensions	11.73" x 11.73" 29.79 cm x 29.79 cm
Overall Thickness	0.314" 8 mm
Edge Profile	Cut
Country Of Origin	United States
Installation Area	Floors, Walls
Retail Unit Of Measure	Sold by the individual piece

Packaging

Pieces per Carton	10
Area per Carton	9.6 ft²
Weight per Carton	39.99 lbs
Area per Pallet	345.6 ft²
Boxes per Pallet	36 boxes

Recommended Installation Method

Grout Joint Requirement: Minimum of 1/8"

Offset Requirements: For a running bond / brick / staggered installation methods. Tiles with a side larger than 15": 33% offset or less. Tiles with a side smaller than 15": 50% offset or less.

Performance + Testing

Shade Variation	V3	
Breaking Strength (ASTM C648)	≥ 275 lbf	
Water Absorption (ASTM C373) %	≤ 0.50% (Impervious (Porcelain))	
DCOF	≥ 0.60	
Scratch Hardness (ASTM MOHS)	7	
Frost Resistance (ASTM C1026)	Resistant	
Chemical Resistance (ASTM C650)	Class A	
Stain Resistance (ASTM C1378)	Class A	
Wear Rating	*4 (Heavy Traffic)	*Designed for commercial areas with regular foot traffic and normal footwear.


Areas of Application

Interior Walls/Backsplash	✓	Interior Wet Plus	✓
Interior Dry Floors	✓	Exterior Wet Floors	
Interior Wet Floors	✓	Exterior Walls	✓
Shower Floors	✓	Oils / Grease	

Warranties

[1 Year Commercial Limited Warranty](#)

Available Colorways

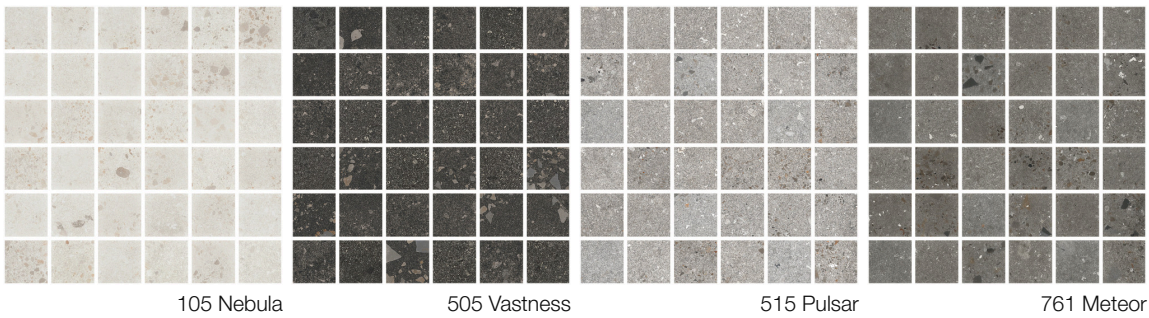

105 Nebula

505 Vastness

515 Pulsar

761 Meteor

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Additional Information

Per ANSI A326.3, a DCOF of ≥ 0.42 is recommended for tiles in commercial applications. Tiles with a DCOF < 0.42 are not recommended for wet or slippery areas. Contaminants like water, oil, or grease can increase slip risk—use caution when selecting products for such environments. For approved Areas of Application, please reference the chart above. For more information, visit www.tcnatile.com.

Not for use on ramps.

Due to natural variation in ceramic and porcelain tile, final selection should be based on actual product samples.

[Ceramic Porcelain Step By Step Installation](#)

[Maintenance Guidelines](#)

Material Health & Environmental Certifications

Climate Impact

Total Recycled Content

62% (Pre-Consumer 62% | Post-Consumer 0%)