

R | Monochrome Matte 18x36

PRODUCT SPECIFICATIONS



COLLECTION	Monochrome + Surface Tone
STYLE NUMBER	I462V
CONSTRUCTION	Heavy Commercial Luxury Vinyl Tile with Fiberglass
WEAR LAYER THICKNESS	20 mil / 0.02 inches (0.508 mm)
OVERALL THICKNESS	0.197 inches (5 mm)
EDGE PROFILE	Squared Edge
REFERENCE SPECIFICATION	ASTM F1700 Class III printed film vinyl plank Type B (embossed)
FINISH	ExoGuard®
INSTALLATION TYPE	Dry Back
INSTALLATION	Glue Down
RECOMMENDED ADHESIVE	4200 (4 gal), 2200 (4 gal), 4252 (4 gal) or S150 SPRAY ADHS

Packaging

PLANK SIZE
PIECES /BOX
AREA /BOX
WEIGHT /BOX

US Units

18 inches W x 36 inches L
6
27 sq ft
45.59 lbs

Metric Units

45.7 cm W x 91.4 cm L
2.5 sq m
20.7 kg

Performance Testing

STATIC LOAD / ASTM F970	Passes (Modified), *1000 lbs
RESIDUAL INDENTATION / ASTM F1914	Passes
RESISTANCE TO CHEMICALS / ASTM F925	Passes
RADIANT PANEL / ASTM E648	Passes, Class I
COEFFICIENT OF FRICTION (ASTM D2047, SLIP RESISTANCE)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

*Results are based on a laboratory test and used for comparative purposes. Real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranty


15 Year Commercial Limited.

Commercial Limited Underbed Bond Warranty S150/Lokworx+ Resilient.

Please visit patcraft.com for the most current warranty information.

R | Monochrome Matte 18x36

Installation Methods

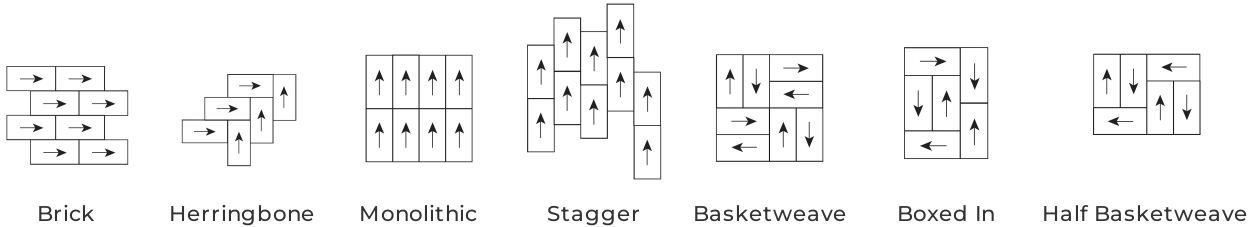

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Environmental Specifications

EMBODIED CARBON (CRADLE TO GATE)

11.59 kg CO₂/m²

Third Party Certifications

HEALTH PRODUCT DECLARATION (HPD)

[1000 ppm Disclosure](#)

ENVIRONMENTAL PRODUCT DECLARATION (EPD)

[3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017](#)

FLOORSCORE®

[Certified](#)

Available Colorways

