

|                           |   |  |
|---------------------------|---|--|
| Numéro Du Style           | H004X                                     |  |
| Collection                | Colour Construct                          |  |
| Type De Produit           | Dalles De Moquette                        |  |
| Construction              | Standard                                  | Data + Performance                           |
| Type De Fabrication       | ISO 2424                                  | tufted 1/12"   47.2 per 10cm                 |
| Construction              | ISO 2424                                  | Tufté Structuré Bouclé à Motif               |
| Méthode De Coloration     | EN 994                                    | 100% Solution Teinte                         |
| Dimensions Du Produit     | EN 994                                    | 57 cm x 49 cm   20 tiles (4.25 m²) per box   |
| Sous-couche Primaire      | ISO 2424                                  | Pet Non-Woven                                |
| Sous-couche Secondaire    | ISO 2424                                  | Taskworx® Tile   Bitume Modifié Par Polymère |
| Fibre                     | ISO 2424                                  | Ecosolution Q® Polyamide 6                   |
| Epaisseur Du Velours      | ISO 1765                                  | 6.2 mm                                       |
| Épaisseur Du Velours Fini | ISO 1766                                  | 1.7 mm                                       |
| Poids Total               | ISO 8543                                  | 4434 g/m²                                    |
| Poids Tufté               | ISO 2424                                  | 794 g/m²                                     |
| Poids Du Velours Utile    | ISO 8543                                  | 244 g/m²                                     |
| Densité Du Velours        | ISO 8543                                  | 0.147 g/cm³                                  |
| Contenu Recyclé Total     | 47% (pre-consumer 47%   post-consumer 0%) |  |





Données

|                                       |               |                            |
|---------------------------------------|---------------|----------------------------|
| Points                                | ISO 1763      | 155,000/m²   32.8 per 10cm |
| Propension Electrostatique            | ISO 6356      | ≤ 2.0 kv (Stroll Test)     |
| Classification d'Utilisation          | EN 1307       | 33 Commercial Heavy        |
| Classification Luxe                   | EN 1307       | LC1                        |
| Stabilité Dimensionnelle              | EN 986        | ≤ 0.2%                     |
| Isolation Acoustique                  | ISO 10140     | 25 Db*                     |
| Classification d'Absorption Sonore    | ISO 354/11654 | 0.15 Aw   Class E*         |
| Résistance Thermique m² K/w           | ISO 8302      | 0.061 M² K/W Tog 0.61      |
| Dry Slip Resistance                   | ISO 13893     | Pass / No Pulled Loops     |
| Résistance De La Couleur À La Lumière | ISO 105-B02   | >6                         |
| Inflammabilité                        | EN 13501-1    | Bfl-S1 (Adhered Testing)   |
| Chaise À Roulette                     | EN 985        | ≥2.4 Continuous USE        |

Limitée Commerciale De 15 Ans subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

Méthodes d'Installation Conseillées

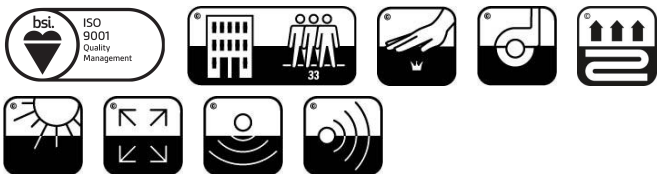

Coordination Des Produits

Carpet Tile: **Pixel Square Comfortworx® Tile, Pixel Rectangle Comfortworx® Tile, Pixel Square Taskworx® Tile, Pixel Rectangle Taskworx® Tile**

Attributs + Certifications

|   |  |
|---|--|
| Certification Cradle to Cradle™ (C2C)         | <b>Bronze Level (Version 3.1)</b>  |
| Déclaration environnementale de produit (EPD) | <b>Certifié Par Un Organisme Tiers Conformément Aux Normes ISO14044, ISO 14025 &amp; EN15804</b> |
| garantie environnementale                     | <b>Take Back Policy Offered For All Taskworx Products</b>  |
| ISO 9001                                      | <b>Certifié</b>  |
| pays d'origine                                | <b>United Kingdom</b>  |
| BREEAM Contribution Credit                    | <b>Certificate of Approval<br/>Schools/Offices/Health/Industrial Shed<br/>Retail</b>             |

Well V2 Contribution Credit

|  |   |
|--|---|
| X08 Hazardous Material Reduction<br>Part 1: Limit Hazardous Materials Optimization                     | <b>C2C Bronze Level (Version 3.1)</b>               |
| X10 Volatile Compound Reduction<br>Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization   | <b>C2C Bronze Level (Version 3.1)</b>               |
| X10 Volatile Compound Reduction<br>Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | <b>C2C Bronze Level (Version 3.1)</b>               |
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization                                       | <b>M1&gt; Emissions Class For Building Material</b> |
| X13 Enhanced Material Precaution<br>Part 1: Select Optimized Materials Optimization                    | <b>C2C Bronze Level (Version 3.1)</b>               |
| X14 Material Transparency<br>Part 1: Promote Ingredient Disclosure Optimization                        | <b>C2C Bronze Level (Version 3.1)</b>               |

Contribution À La Certification Leed

|   |  |
|---|--|
| MR Credit: Building Product Disclosure and Optimisation<br>Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | <b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b> |
| MR Credit: Building Product Disclosure and Optimisation<br>Material Ingredients - Option 1: Material Ingredient Reporting                         | <b>C2C Bronze Level (Version 3.1)</b>  |
| MR Credit: Building Product Disclosure and Optimisation<br>Material Ingredients - Option 2: Material Ingredient Optimization                      | <b>C2C Bronze Level (Version 3.1)</b>  |
| "Crédit EQ : matériaux faibles émissions<br>Option 1 : calculs par catégorie de produit"  | <b>Certified</b>   |

























Air Quality

|                         |                  |
|-------------------------|------------------|
| Indoor Air Comfort Gold | <b>Certified</b> |
| M1                      | <b>Certified</b> |

Memberships

|                                 |  |
|---------------------------------|--|
| WGBC Framework                  | <b>WGBC Framework</b>                  |
| UKGBC                           | <b>UKGBC</b>                           |
| Emirates Green Building Council | <b>Emirates Green Building Council</b> |
| Chemsec                         | <b>Chemsec</b>                         |

Indice De Réflexion Lumineuse

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|    |    |    |    |    |    |
| Yellow 53211<br>LRV 26.5   | Chartreuse 53326<br>LRV 17.3  | Seaglass 53375<br>LRV 8.2   | Aqua 53418<br>LRV 13.9   | Wave 53432<br>LRV 6.8   | Navy 53485<br>LRV 5.3   |
|    |    |    |    |    |    |
| Blue 53486<br>LRV 9.5  | Artic 53501<br>LRV 31   | Black 53505<br>LRV 2.6  | Light Taupe 53506<br>LRV 16.8  | Grey 53515<br>LRV 18.4  | Beige 53516<br>LRV 23.4   |
|   |   |   |   |   |   |
| Pewter 53518<br>LRV 11.3   | Nickel 53535<br>LRV 18.9  | Graphite 53549<br>LRV 3.9   | Charcoal 53557<br>LRV 6.2  | Steel 53580<br>LRV 7.5  | Urban 53592<br>LRV 11.8   |
|  |  |  |  |  |  |
| Gunmetal 53597<br>LRV 4.1  | Orange 53668<br>LRV 12.8  | Tangerine 53675<br>LRV 23.1   | Taupe 53761<br>LRV 12.5  | Poppy 53856<br>LRV 9.8  | Magenta 53991<br>LRV 5.6  |

Informations Supplémentaires

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

[Limitée commerciale de 15 ans](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.





Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | **Atlanta** +1 404 853 7429 | **Bengaluru** +91 80 6773 0202 | **Beijing** +86 10 6568 588 | **Chicago** +1 312 467 1331 | **Dubai** +971 4 584 6956 | **Hong Kong** +852 2623 0371 | **Latin America (Miami)** +1 305 827 5912 | **London** +44 207 961 4120 | **Los Angeles** +1 800 233 1614 | **Melbourne** +61 3 9939 8543 | **Mexico City** +55 5010 7600 | **Mumbai** +91 22 6284 5050 | **Nantong** +86 400 800 7429 | **New York** +1 212 953 7429 | **Paris** +33 (0) 1 81 22 44 39 | **San Francisco** +1 415 955 1920 | **Santiago** +562 2431 5000 x 550 | **São Paulo** +55 11 3071 1702 | **Shanghai** +86 21 3338 4000 | **Singapore** +65 6733 1811 | **Sydney** +1 800 556 302