

## Defined


Collection	<b>Stratum</b>	
Style Number	<b>058UV</b>	
Construction	<b>Multilayer WPC With Attached Cork Underlayment</b>	
Class / ASTM F3261	<b>Class III, Type B</b>	
Attached Underlayment	<b>Cork</b>	
Finish	<b>ExoGuard®</b>	
	U.S.	Metric
Nominal Dimensions	<b>7 in w x 48 in l</b>	<b>18 cm w x 122 cm l</b>
Actual Dimensions	<b>7.09 in w x 48.03 in l</b>	<b>18.01 cm w x 122.00 cm l</b>
Wear Layer Thickness	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Overall Thickness	<b>0.315 in</b>	<b>8 mm</b>
Edge Profile	<b>Accent Bevel</b>	
Installation Type	<b>Click</b>	
Installation	<b>Floating Or Direct Glue</b>	
Recommended Adhesive	<b>, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL</b>	



## Packaging

Pieces per Carton	<b>10 pcs</b>	
Area per Carton	<b>23.64 sq ft</b>	<b>2.2 sq m</b>
Weight per Carton	<b>39.68 lbs</b>	<b>18 kg</b>

## Recommended Installation Method



## Coordinating Products

None: Stratum 1200  
 COREtec: Stratum 500, Stratum 700, Stratum XI, Stratum Eiris, Stratum Linear

## Performance + Testing

Static Load (ASTM F970)	<b>Passes (Modified), *750 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Resistance to Heat (ASTM F1514)	<b>Passes</b>	
Resistance to Light (ASTM F1515)	<b>Passes</b>	
Resistance to Chemicals (ASTM F925)	<b>Passes</b>	
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

[15 Year Commercial Limited Warranty](#)

## Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Material Health & Environmental Certifications

### Health & Wellbeing

Material Ingredient Transparency	<a href="#">Health Product Declaration (HPD)   1000 ppm Disclosure</a>
Indoor Air Quality	<a href="#">FloorScore®   Certified</a>

### Climate Impact

Environmental Product Declaration (EPD)	<a href="#">3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</a>
Total Recycled Content	41% (Pre-Consumer 41%   Post-Consumer 0%)

### Global Product Assessment

Country of Origin | China

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>Absence of Halogenated Flame Retardants</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>Greenguard Gold Certificate</b>

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

[Installation Guidelines](#)

[Maintenance Guidelines](#)

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore Certified**


Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

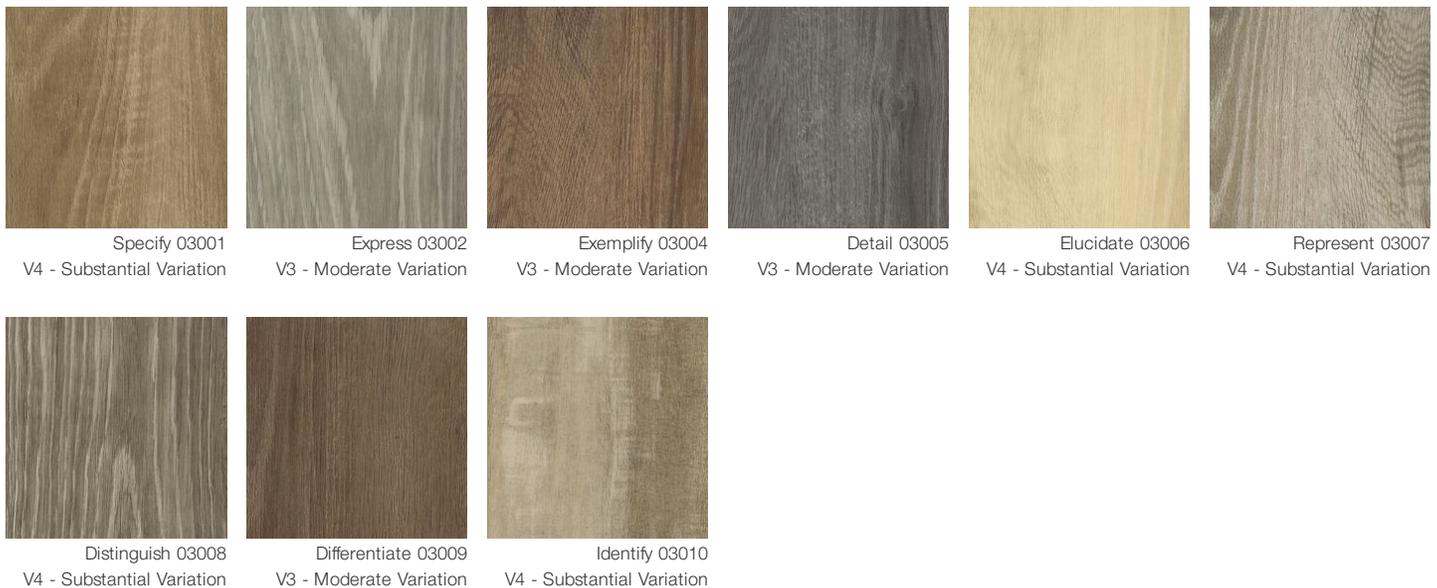

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

