


Concrete

|                       |  |                         |
|-----------------------|--|-------------------------|
| Collection            | Concrete + Composed  |                         |
| Style Number          | 094UV  |                         |
| Construction          | Multilayer SPC With Attached Cork Underlayment   |                         |
| Class / ASTM F3261    | Class III, Type B  |                         |
| Attached Underlayment | Cork   |                         |
| Finish                | ExoGuard®  |                         |
|                       | U.S.   | Metric                  |
| Nominal Dimensions    | 19 in w x 24 in l  | 47 cm w x 61 cm l       |
| Actual Dimensions     | 18.50 in w x 24.02 in l  | 46.99 cm w x 61.01 cm l |
| Wear Layer Thickness  | 20 mil (0.02 in)   | 0.51 mm                 |
| Overall Thickness     | 0.217 in   | 5.5 mm                  |
| Edge Profile          | Micro-Bevel  |                         |
| Installation Type     | Click  |                         |
| Installation          | Floating Or Direct Glue  |                         |
| Recommended Adhesive  | , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL |                         |

Packaging

|                   |             |           |
|-------------------|-------------|-----------|
| Pieces per Carton | 10 pcs      |           |
| Area per Carton   | 30.86 sq ft | 2.87 sq m |
| Weight per Carton | 52.91 lbs   | 24 kg     |

Recommended Installation Method

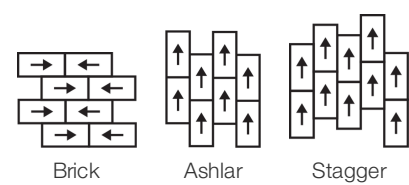

Coordinating Products

COREtec: Composed

Performance + Testing

|   |   |
|---|---|
| Static Load (ASTM F970)                               | Passes  |
| Residual Indentation (ASTM F1914)                     | Passes  |
| Resistance to Heat (ASTM F1514)                       | Passes  |
| Resistance to Light (ASTM F1515)                      | Passes  |
| Radiant Panel (ASTM E648)                             | Passes, Class I   |
| Coefficient of Friction (ASTM D2047, Slip Resistance) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Material Health & Environmental Certifications

|   |  |
|---|--|
| Health & Wellbeing                      |  |
| Material Ingredient Transparency        | Health Product Declaration (HPD)   1000 ppm Disclosure                       |
| Indoor Air Quality                      | FloorScore®   Certified  |
| Climate Impact                          |  |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Total Recycled Content                  | 0% (Pre-Consumer 0%   Post-Consumer 0%)                                      |
| Global Product Assessment               | CE Marking (EN 14041)   3rd Party Certified                                  |
|   | Country of Origin   China  |

WELL V2 Contribution Credit

|  |   |
|--|---|
| X01 Fundamental Material Precautions<br>Part 1: (C): Restrict Asbestos Precondition                    | Absence of Asbestos                     |
| X08 Hazardous Material Reduction<br>Part 1: Limit Hazardous Materials Optimization                     | Absence of Heavy Metals                 |
| X10 Volatile Compound Reduction<br>Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization   | Absence of Halogenated Flame Retardants |
| X10 Volatile Compound Reduction<br>Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | Ortho-Phthalates                        |
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization                                       | Greenguard Gold Certificate             |

Leed v4 Contribution Credits

|   |  |
|---|--|
| MR Credit: Building Product Disclosure and Optimization<br>Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| EQ Credit: Low Emitting Materials<br>Option 1: Product Category Calculations  | FloorScore Certified   |

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply  
and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of  
this design in the creation of another product design is also strictly prohibited.  
\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse  
suppliers from which to choose. Compared to non-allowable spend which includes  
categories in which we do not have domestic, small or diverse suppliers available to  
meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

|  |   |   |  |
|--|---|---|--|
|  |  |  |  |
| Misty Quartz 03501<br>LRV 51.2   L* 76.8   | Tempered Concre 03502<br>LRV 28.1   L* 59.95                                      | Rugged Platinum 03503<br>LRV 23.2   L* 55.33                                      | Forged Concrete 03507<br>LRV 22.1   L* 54.13                                       |

