


Concrete

Collection	Concrete + Composed	
Style Number	094UV	
Construction	Multilayer SPC With Attached Cork Underlayment	
Class / ASTM F3261	Class III, Type B	
Attached Underlayment	Cork	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	19 in w x 24 in l	47 cm w x 61 cm l
Actual Dimensions	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.217 in	5.5 mm
Edge Profile	Micro-Bevel	
Installation Type	Click	
Installation	Floating Or Direct Glue	
Recommended Adhesive	, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	

Packaging

Pieces per Carton	10 pcs	
Area per Carton	30.86 sq ft	2.87 sq m
Weight per Carton	52.91 lbs	24 kg

Recommended Installation Method

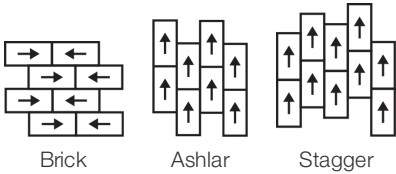

Coordinating Products

COREtec: Composed

Performance + Testing

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Coefficient of Friction (ASTM D2047, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	11.8 Kg CO ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	
	CE Marking (EN 14041) 3rd Party Certified
	Country of Origin China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	Greenguard Gold Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

			
Misty Quartz 03501 LRV 51.2 L* 76.8	Tempered Concre 03502 LRV 28.1 L* 59.95	Rugged Platinum 03503 LRV 23.2 L* 55.33	Forged Concrete 03507 LRV 22.1 L* 54.13

