

In Tandem

Collection	Innate + In Tandem	
Style Number	0896V	
Construction	Commercial Bio-Based Polyurethane Heterogeneous Tile	
Class / ASTM F1303	ASTM F06 (In Development)	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	10 in w x 59 in l	25 cm w x 150 cm l
Actual Dimensions	9.84 in w x 59.05 in l	24.99 cm w x 149.99 cm l
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	4200 Resilient Tile 4 Gallon	


Packaging

Pieces per Carton	12 pcs	
Area per Carton	48.44 sq ft	4.5 sq m
Weight per Carton	35.27 lbs	16 kg

Packaging can vary by color, contact 800.257.7429 to confirm packaging information prior to ordering.



Recommended Installation Method

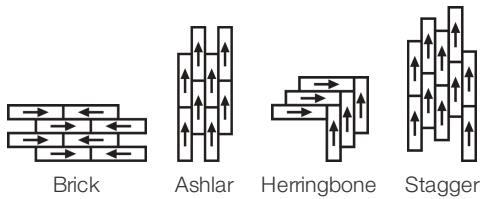

Coordinating Products

PVC-Free: Innate, In Tandem Sheet, Innate Sheet, Innate Linen Sheet, Innate Stria Tile

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Flexibility (ASTM F137)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Warranties

- 15 Year Commercial Limited Warranty
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency	Greenhealth Approved Yes Cradle to Cradle Certified™ Silver Level (Version 3.1) Health Product Declaration (HPD) 1000 ppm Disclosure Declare LBC Compliant
Indoor Air Quality	FloorScore® Certified

Climate Impact

Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition

C2C Silver Level (Version 3.1)

X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization

C2C Silver Level (Version 3.1)

X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

C2C Silver Level (Version 3.1)

X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

C2C Silver Level (Version 3.1)

X11 Long Term Emissions Control
Part 2: Flooring Optimization

FloorScore & Greenguard Gold Certificate

X13 Enhanced Material Precaution
Part 1: Select Optimized Materials Optimization

C2C Silver Level (Version 3.1)

X14 Material Transparency
Part 1: Promote Ingredient Disclosure Optimization

C2C Silver Level (Version 3.1)

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

Health Product Declaration (HPD) | 100 Ppm Disclosure

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 2: Material Ingredient Optimization

C2C Silver Level (Version 3.1)

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with EN 15804, ISO 14025

MR Credit: Building Product Disclosure and Optimization
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices

Bio-Based Materials - Meets Astm D6866 And ISO 16620-2

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

FloorScore Certified

Additional Information

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.



Visit shawcontract.com/testing for more information.

Available Colorways

					
Buff 96105 LRV 43.9 L* 72.13 V2 - Slight Variation	Pane 96130 LRV 33 L* 64.17 V2 - Slight Variation	Spry 96250 LRV 36.4 L* 66.84 V2 - Slight Variation	Bough 96510 LRV 34.2 L* 65.15 V2 - Slight Variation	Winnow 96560 LRV 16.5 L* 47.69 V2 - Slight Variation	Link 96580 LRV 13.1 L* 42.96 V2 - Slight Variation
					
Groove 96590 LRV 9.1 L* 36.08 V2 - Slight Variation	Laurel 96600 LRV 19.5 L* 51.23 V2 - Slight Variation	Twain 96650 LRV 13.6 L* 43.63 V2 - Slight Variation	Raffia 96710 LRV 24.2 L* 56.31 V2 - Slight Variation	Burl 96760 LRV 19 L* 50.73 V2 - Slight Variation	Linden 96790 LRV 13.6 L* 43.68 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1 	V2 	V3 	V4 
Uniform Appearance	Slight Variation	Moderate Variation	Substantial Variation

