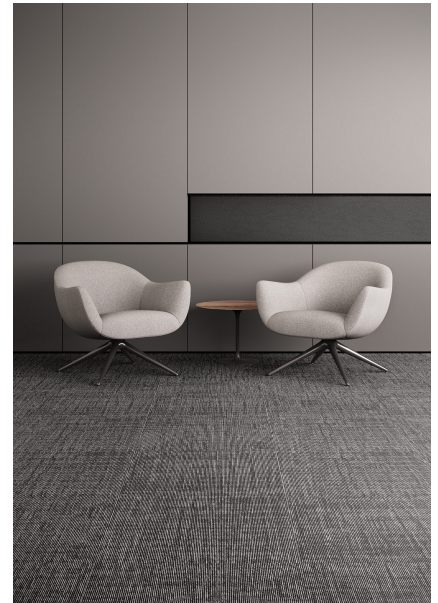


## Intent Taskworx® Tile

Stijlnummer	<b>5T336</b>	
Collectie	<b>District</b>	
Producttype	<b>Tapijttegel</b>	
Construction	Standard	Data + Performance
Type Fabricage	<b>ISO 2424</b>	<b>tufted 1/10"   39.4 per 10cm</b>
Uitzicht	<b>ISO 2424</b>	<b>Multilevel-Patroonlus</b>
Verfmethode	<b>EN 994</b>	<b>100% In Oplossing Geverfd</b>
Productformaat	<b>EN 994</b>	<b>50 cm x 50 cm   20 tiles (5 m²) per box</b>
Primaire Backing	<b>ISO 2424</b>	<b>Pet Nonwoven</b>
Secundaire Backing	<b>ISO 2424</b>	<b>Taskworx® Tegel   Polymeer Gemodificeerd Bitumen</b>
Vezel	<b>ISO 2424</b>	<b>Ecosolution Q® Polyamide 6</b>
Totale Dikte	<b>ISO 1765</b>	<b>6.2 mm</b>
Afgewerkte Pooldikte	<b>ISO 1766</b>	<b>2.1 mm</b>
Totale Massa	<b>ISO 8543</b>	<b>4022 g/m²</b>
Getuft Gewicht	<b>ISO 2424</b>	<b>474 g/m²</b>
Effectieve Poolmassa	<b>ISO 8543</b>	<b>219 g/m²</b>
Pooldichtheid	<b>ISO 8543</b>	<b>0.102 g/cm³</b>
Totaal Gerecycleerde Inhoud		<b>51% (pre-consumer 51%   post-consumer 0%)</b>




### Gegevens

Steken	<b>ISO 1763</b>	<b>153,000/m²   38.7 per 10cm</b>
Elektrostatische Weerstand	<b>ISO 6356</b>	<b>≤ 2.0 kv (Stroll Test)</b>
Gebruik Classificatie	<b>EN 1307</b>	<b>33 Commercial Heavy</b>
Luxeklasse	<b>EN 1307</b>	<b>LC1</b>
Dimensionale Stabiliteit	<b>EN 986</b>	<b>≤ 0.2%</b>
Contactgeluidsisolatie	<b>ISO 10140</b>	<b>25db</b>
Geluidsabsorptieclassificatie	<b>ISO 354/11654</b>	<b>0.15 Aw   Class E</b>
Warmteweerstand m² K/w	<b>ISO 8302</b>	<b>0.081 M² K/W Tog 0.81</b>
Weerstand Tegen Droog Uitglijden	<b>ISO 13893</b>	<b>Pass / No Pulled Loops</b>
Kleurvastheid Voor Licht	<b>ISO 105-B02</b>	<b>&gt;6</b>
Ontvlambaarheid	<b>EN 13501-1</b>	<b>Bfl-S1 (Adhered Testing)</b>
Stoel Met Wieltjes	<b>EN 985</b>	<b>≥2.4 Continuous Use</b>

15 Jaar Commercieel Beperkt subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

### Aanbevolen Installatiemethode



17

EU.DOP/0493/CPR/0621/0422/BT

OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905 BL NETHERLANDS (NLD)

Notified Body 2895

22

UK.DOP/0338/CPR/1220/0422/BT

SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 0338

EN14041:2004/AC:2006

For use as an indoor floor covering as specified by the manufacturer

## Coördinerende Producten

Carpet Tile: **Purpose Taskworx® Tile, Situation Taskworx® Tile**

## Kenmerken + Certificeringen

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Declaration of Performance

Building Research Establishment (BRE)

land van herkomst

BREEAM Contribution Credit

**EU.DOP/0493/CPR/0621/0422/BT****A+ Health/A+ Retail 0.301/0.399 Ecopoints****Verenigd Koninkrijk****Certificate of Approval  
Schools/Offices/Health/Industrial Shed  
Retail**

## Air Quality

Indoor Air Comfort Gold

M1

**Certified****Certified**

## Memberships

WGBC Framework




UKGBC

Emirates Green Building Council

Chemsec

**WGBC Framework****UKGBC****Emirates Green Building Council****Chemsec**

## Lichtreflectiewaarde

Stellar 08505  
LRV 3.1 | L\* 20.31Skylight 08530  
LRV 13.4 | L\* 43.32Nocturne 08557  
LRV 7.7 | L\* 33.45Shale 08597  
LRV 5.3 | L\* 27.58Woodsmoke 08760  
LRV 8.9 | L\* 35.7Sierra 08761  
LRV 11.2 | L\* 39.87

## Aanvullende Informatie

15 jaar commercieel beperkt

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.