




Style Number	5T362	
Collection	Living Systems	
Product Type	Carpet Tile	
Construction	Standard	Data + Performance
Type of Manufacture	ISO 2424	tufted 1/10"   39.4 per 10cm
Aspect	ISO 2424	Multi-Level Pattern Loop
Dye Method	EN 994	100% Solution Dyed
Dimensions	EN 994	25 cm x 100 cm
Primary Backing	ISO 2424	Pet Non-Woven
Secondary Backing	ISO 2424	Taskworx® Tile   Polymer Modified Bitumen
Pile Fibre Composition	ISO 2424	Eco Solution Q100™ Polyamide 6   Contains 100% Recycled Content
Total Thickness	ISO 1765	7.3 mm
Effective Pile Thickness	ISO 1766	1.5 mm
Total Mass	ISO 8543	5123 g/m <sup>2</sup>
Nominal Total Pile Mass	ISO 2424	746 g/m <sup>2</sup>
Effective Pile Mass	ISO 8543	214 g/m <sup>2</sup>
Pile Density	ISO 8543	0.141 g/cm <sup>3</sup>
Total Recycled Content	65% (pre-consumer 65%   post-consumer 0%)	


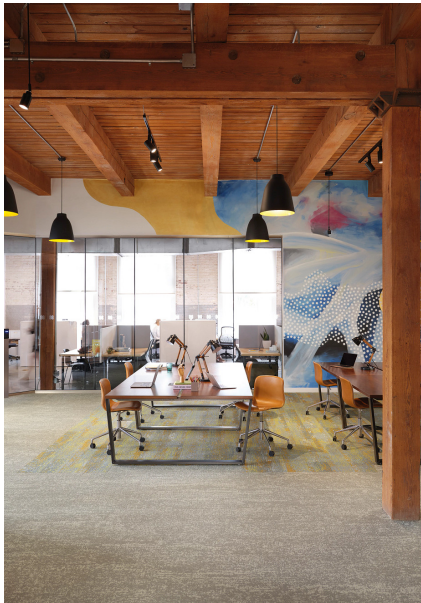


Performance

Number of Tufts	ISO 1763	124,000/m <sup>2</sup>   31.5 per 10cm
Electrostatic Propensity	ISO 6356	≤ 2.0 kv (Stroll Test)
Use Classification	EN 1307	33 Commercial Heavy
Luxury Class	EN 1307	LC1
Dimensional Stability	EN 986	≤ 0.2%
Impact Sound Insulation	ISO 10140	24 Db
Sound Absorption Classification	ISO 354/11654	0.15 Aw   Class E
Thermal Resistance m <sup>2</sup> K/W	ISO 8302	0.072 M <sup>2</sup> K/W Tog 0.72
Dry Slip Resistance	ISO 13893	Pass / No Pulled Loops
Colour Fastness To Light	ISO 105-B02	>6
Flammability	EN 13501-1	Bfl-S1 (Adhered Testing)
Castor Chair	EN 985	≥2.4 Continuous Use

15 Year Commercial Limited Warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

Recommended Installation Method

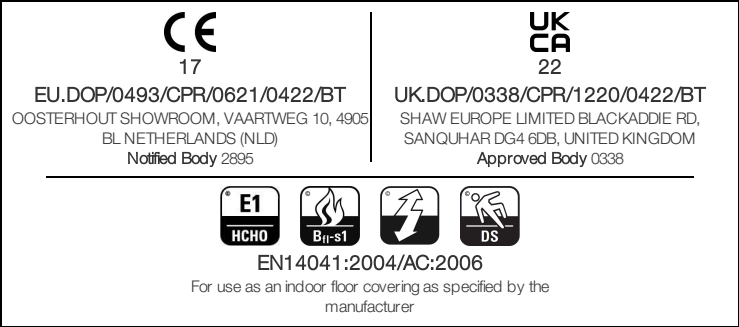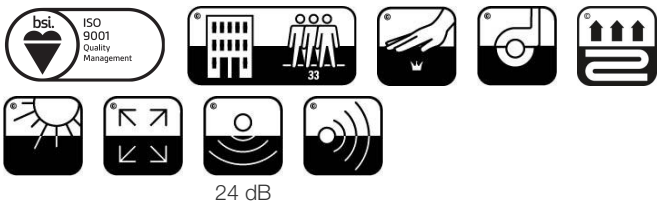

Coordinating Products

Carpet Tile: **Observe Colour Comfortworx® Tile, Endless Comfortworx® Tile, Respond Colour Comfortworx® Tile, Transform Colour Comfortworx® Tile, Source Comfortworx® Tile, Boundless Comfortworx® Tile, Observe Comfortworx® Tile, Respond Comfortworx® Tile, Transform Comfortworx® Tile, Respond Taskworx® Tile, Observe Taskworx® Tile, Transform Taskworx® Tile, Respond Colour Taskworx® Tile, Observe Colour Taskworx® Tile, Transform Colour Taskworx® Tile, Boundless Taskworx® Tile, Source Taskworx® Tile**

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. TaskWorx® products are Cradle to Cradle Certified® Bronze and assessed for impacts on human health and the environment. This product can be recycled. When it's time to replace, we can collect through our re-[TURN] scheme in EMEA.

Material Health & Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

Declaration of Performance	<b>EU.DOP/0493/CPR/0621/0422/BT</b>
Cradle to Cradle Certified®	<b>Bronze Level (Version 3.1)</b>
Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO 14044, ISO 14025 &amp; EN15804</b>
Embodied Carbon (Cradle to Gate)	<b>4.07 kg CO<sub>2</sub>/m<sup>2</sup></b>
Life-Cycle Carbon Emissions	<b>Carbon Neutral</b>
Environmental Guarantee*	<b>Take Back Policy Offered For All Taskworx Products</b>
ISO 9001	<b>Certified</b>
Country of Origin**	<b>United Kingdom</b>
BREEAM Contribution Credit	<b>Certificate of Approval Schools/Offices/Health/Industrial Shed Retail</b>

WELL V2 Contribution Credit

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>M1&gt; Emissions Class For Building Material</b>
X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization	<b>C2C Bronze Level (Version 3.1)</b>

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b>
MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	<b>C2C Bronze Level (Version 3.1)</b>
MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 2: Material Ingredient Optimization	<b>C2C Bronze Level (Version 3.1)</b>
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	<b>Certified</b>



















Air Quality

Indoor Air Comfort Gold	Certified
M1	Certified

Memberships

WGBC Framework	WGBC Framework
UKGBC	UKGBC
Emirates Green Building Council	Emirates Green Building Council
Chemsec	Chemsec

Light Reflectance Value

 <div>Optimistic 05105 LRV 24.6   L* 56.67</div>	 <div>Ochre 05225 LRV 22.5   L* 54.51</div>	 <div>Nature 05326 LRV 16.4   L* 47.55</div>	 <div>Lake 05327 LRV 22.2   L* 54.26</div>	 <div>Forests 05334 LRV 5.3   L* 27.62</div>	 <div>Oceans 05405 LRV 7.2   L* 32.3</div>
 <div>Flora 05411 LRV 16.3   L* 47.35</div>	 <div>Springs 05440 LRV 7.6   L* 33.15</div>	 <div>Skies 05486 LRV 5.1   L* 27.04</div>	 <div>Lava 05500 LRV 6.9   L* 31.67</div>	 <div>Deepest 05505 LRV 5   L* 26.78</div>	 <div>Radiant 05515 LRV 18.9   L* 50.56</div>
 <div>Wild 05557 LRV 10.5   L* 38.64</div>	 <div>Calm 05580 LRV 8.7   L* 35.39</div>	 <div>Untamed 05595 LRV 11.9   L* 41.13</div>	 <div>Fragile 05760 LRV 12.3   L* 41.75</div>	 <div>Mountain 05761 LRV 17.7   L* 49.14</div>	 <div>Coral 05865 LRV 9.5   L* 37.01</div>

Additional Information

**Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.	
<a href="#">Installation Guidelines</a>	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
<a href="#">Maintenance Guidelines</a>	
<a href="#">15 Year Commercial Limited warranty</a>	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

