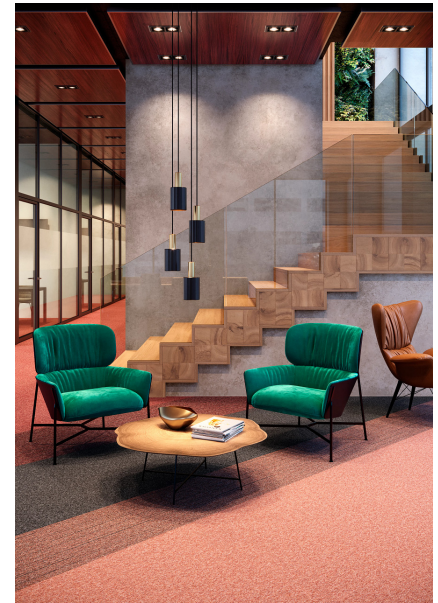


## Complement Taskworx® Tile

Style Number	<b>5T383</b>	
Collection	<b>Auxiliary</b>	
Product Type	<b>Carpet Tile</b>	
Construction	<b>Standard</b>	<b>Data + Performance</b>
Type of Manufacture	<b>ISO 2424</b>	<b>tufted 1/12"   47.2 per 10cm</b>
Aspect	<b>ISO 2424</b>	<b>Level Loop</b>
Dye Method	<b>EN 994</b>	<b>100% Solution Dyed</b>
Dimensions	<b>EN 994</b>	<b>50 cm x 50 cm   20 tiles (5 m²) per box</b>
Primary Backing	<b>ISO 2424</b>	<b>Pet Non-Woven</b>
Secondary Backing	<b>ISO 2424</b>	<b>Taskworx® Tile   Polymer Modified Bitumen</b>
Pile Fibre Composition	<b>ISO 2424</b>	<b>Aquafil Polyamide 6</b>
Total Thickness	<b>ISO 1765</b>	<b>5.3 mm</b>
Effective Pile Thickness	<b>ISO 1766</b>	<b>2.1 mm</b>
Total Mass	<b>ISO 8543</b>	<b>3920 g/m²</b>
Nominal Total Pile Mass	<b>ISO 2424</b>	<b>450 g/m²</b>
Effective Pile Mass	<b>ISO 8543</b>	<b>259 g/m²</b>
Pile Density	<b>ISO 8543</b>	<b>0.122 g/cm³</b>
Total Recycled Content		<b>51% (pre-consumer 51%   post-consumer 0%)</b>

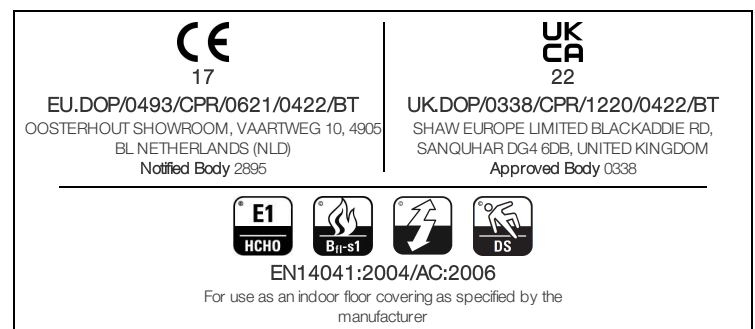
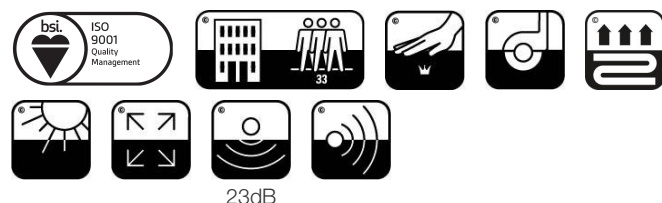



### Performance

Number of Tufts	<b>ISO 1763</b>	<b>184,000/m²   39 per 10 cm</b>
Electrostatic Propensity	<b>ISO 6356</b>	<b>≤ 2.0 kv (Stroll Test)</b>
Use Classification	<b>EN 1307</b>	<b>33 Commercial Heavy</b>
Luxury Class	<b>EN 1307</b>	<b>LC1</b>
Dimensional Stability	<b>EN 986</b>	<b>≤ 0.2%</b>
Impact Sound Insulation	<b>ISO 10140</b>	<b>23db</b>
Sound Absorption Classification	<b>ISO 354/11654</b>	<b>0.15 Aw   Class E</b>
Thermal Resistance m² K/W	<b>ISO 8302</b>	<b>0.046 M² K/W Tog 0.46</b>
Dry Slip Resistance	<b>ISO 13893</b>	<b>Pass / No Pulled Loops</b>
Colour Fastness To Light	<b>ISO 105-B02</b>	<b>&gt;6</b>
Flammability	<b>EN 13501-1</b>	<b>Bfl-S1 (Adhered Testing)</b>
Castor Chair	<b>EN 985</b>	<b>≥2.4 Continuous Use</b>

**15 Year Commercial Limited Warranty** subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

### Recommended Installation Method



## Coordinating Products

Carpet Tile: **Complement Hexagon Taskworx® Tile, Detail Hexagon Taskworx® Tile, Feature Hexagon Taskworx® Tile, Detail Taskworx® Tile, Feature Taskworx® Tile**

## Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. TaskWorx® products are Cradle to Cradle Certified® Bronze and assessed for impacts on human health and the environment. This product can be recycled. When it's time to replace, we can collect through our re-[TURN] scheme in EMEA.

## Material Health &amp; Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

Declaration of Performance	<b>EU.DOP/0493/CPR/0621/0422/BT</b>
Cradle to Cradle Certified®	<b>Bronze Level (Version 3.1)</b>
Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b>
Building Research Establishment (BRE)	<b>A+ Health/A+ Retail 0.301/0.399 Ecopoints</b>
Environmental Guarantee*	<b>Take Back Policy Offered For All Taskworx Products</b>
ISO 9001	<b>Certified</b>
Country of Origin**	<b>United Kingdom</b>
BREEAM Contribution Credit	<b>Certificate of Approval Schools/Offices/Health/Industrial Shed Retail</b>

## WELL V2 Contribution Credit

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>M1&gt; Emissions Class For Building Material</b>
X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization	<b>C2C Bronze Level (Version 3.1)</b>

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b>
MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	<b>C2C Bronze Level (Version 3.1)</b>
MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 2: Material Ingredient Optimization	<b>C2C Bronze Level (Version 3.1)</b>
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	<b>Certified</b>



















Air Quality

Indoor Air Comfort Gold	Certified
M1	Certified

Memberships

WGBC Framework	WGBC Framework
UKGBC	UKGBC
Emirates Green Building Council	Emirates Green Building Council
Chemsec	Chemsec

Light Reflectance Value

 <div>→ Spring 83326 LRV 17.7   L* 49.08</div>	 <div>→ Mint 83327 LRV 15.9   L* 46.86</div>	 <div>→ Seaweed 83335 LRV 10.3   L* 38.29</div>	 <div>→ Jade 83406 LRV 10   L* 37.83</div>	 <div>→ Lagoon 83419 LRV 13   L* 42.8</div>	 <div>→ Cadet 83440 LRV 11.3   L* 40.15</div>
 <div>→ Azure 83486 LRV 9.8   L* 37.54</div>	 <div>→ Admiral 83496 LRV 4   L* 23.75</div>	 <div>→ Black 83505 LRV 3.6   L* 22.12</div>	 <div>→ Ash 83535 LRV 18.2   L* 49.71</div>	 <div>→ Ice 83536 LRV 20.9   L* 52.84</div>	 <div>→ Flint 83549 LRV 3.6   L* 22.28</div>
 <div>→ Pebble 83558 LRV 7.7   L* 33.37</div>	 <div>→ Smoke 83581 LRV 9.4   L* 36.76</div>	 <div>→ Blush 83675 LRV 18.3   L* 49.9</div>	 <div>→ Crimson 83857 LRV 7.7   L* 33.24</div>	 <div>→ Coral 83866 LRV 11.5   L* 40.45</div>	 <div>→ Blossom 83870 LRV 11   L* 39.57</div>

→ Quick Ship In Stock - UK

Additional Information

**Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.	
<a href="#">Installation Guidelines</a>	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
<a href="#">Maintenance Guidelines</a>	
<a href="#">15 Year Commercial Limited warranty</a>	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

