

Eon


Collection	Eon + Amalgam	
Style Number	4112V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	20 in w x 20 in l	50 cm w x 50 cm l
Actual Dimensions	19.69 in w x 19.69 in l	50.01 cm w x 50.01 cm l
Wear Layer Thickness	22 mil (0.022 in)	0.56 mm
Overall Thickness	0.197 in	5 mm
Edge Profile	Squared Edge	
Installation Type	Loose Lay	
Installation	Direct Glue Or Perimeter Glue	
Recommended Adhesive	2200 1 Gallon, 2200 4 Gallon, 4151, 4200 1 Gallon, 4200 4 Gallon, 4252 (No Heavy Rolling or Static Loads) or S150-95	



Packaging

Pieces per Carton	10 pcs	
Area per Carton	26.91 ft²	2.5 m²
Weight per Carton	45.86 lbs	20.8 kg
Area per Pallet	1184.04 ft²	110 m²
Boxes per Pallet	44 boxes	

Recommended Installation Method

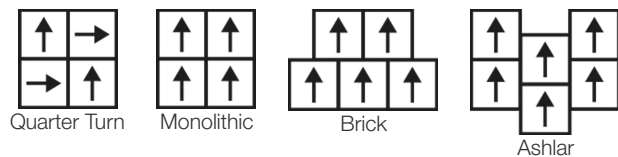

Coordinating Products

LVT: Amalgam

Performance + Testing

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
coefficient of friction (ASTM D2407, slip resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certified

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

11.59 Kg Co₂/M²
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

Works With Well | Well V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore® Certified
Health Product Declaration (HPD) | 1000 Ppm Disclosure

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting
MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)
EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 1000 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified

Additional Information

**Meets or exceeds all local and national regulations in country of manufacture.


[installation guidelines](#)
[maintenance guidelines](#)

Please Visit www.shawcontract.com For The Most Current Warranty Information. Specifications Are Subject To Nominal Manufacturing Variance. Material Supply And/or Manufacturing Processes May Necessitate Changes Without Notice.

This Product Is An Exclusive Design And May Not Be Duplicated In Any Manner. Use Of This Design In The Creation Of Another Product Design Is Also Strictly Prohibited.

Visit Shawcontract.com/testing For More Information.

Available Colorway

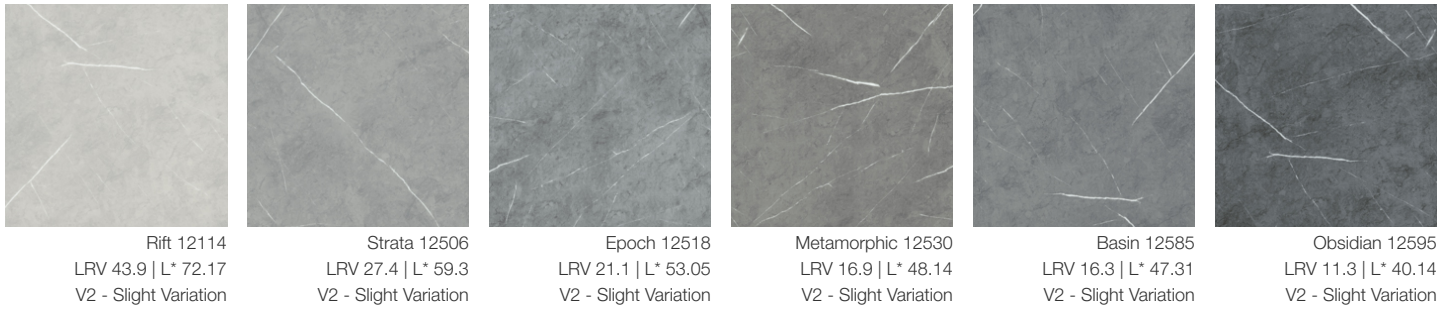

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

