

Reside 12 Mil


| | | |
|---------------------------|---|--------------------------|
| Collection | Reside | |
| Style Number | 4094V | |
| Construction class | Light Commercial Luxury Vinyl Tile | |
| Finish | ExoGuard® | |
| | U.s. | Metric |
| Nominal Dimensions | 6 in w x 47 in l | 15 cm w x 120 cm l |
| Actual Dimensions | 5.91 in w x 47.24 in l | 15.01 cm w x 119.99 cm l |
| Wear Layer Thickness | 12 mil (0.012 in) | 0.3 mm |
| Overall Product Thickness | 0.079 in | 2 mm |
| Edge Profile | Squared Edge | |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon | |



Packaging

| | | |
|----------------|------------|-----------|
| Pieces Per Box | 27 pcs | |
| Area Per Box | 52.3 sq ft | 4.86 sq m |
| Weight Per Box | 40.25 lbs | 18.26 kg |

Recommended Installation Method

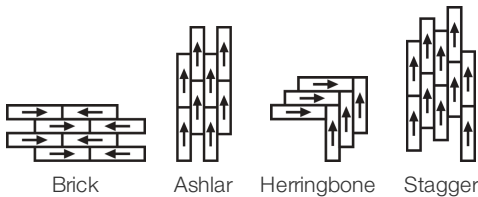

Coordinating Products

LVT: Reside 8 Mil, Reside 6 Mil, Reside 20 Mil

performance + testing

| | | |
|---|---|--|
| static load (ASTM F970) | Passes (Modified), *1500 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| residual indentation (ASTM F1914) | Passes | |
| resistance to heat (ASTM F1514) | Passes | |
| resistance to light (ASTM F1515) | Passes | |
| radiant panel (ASTM E648) | Passes, Class I | |
| coefficient of friction (ASTM D2407, slip resistance) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces | |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[7 Year Light Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributes + Certifications

Health & Wellbeing

- Material Ingredient Transparency
- Indoor Air Quality
- Health Product Declaration (HPD) | 1000 ppm Disclosure
- FloorScore® | Certified

Climate Impact

- Environmental Product Declaration (EPD)
- Embodied Carbon (Cradle to Gate)
- Life-Cycle Carbon Emissions
- Total Recycled Content
- 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
- 6.05 Kg CO₂/M²
- Low Embodied Carbon
- 0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

WELL V2 Contribution Credit

- X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
- X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
- X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
- Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
- X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
- Absence of Asbestos
- Absence of Heavy Metals
- Absence of Halogenated Flame Retardants
- Ortho-Phthalates
- FloorScore Certificate

Green Leed Contribution Credit

- MR Credit: Building Product Disclosure and Optimization
- Material Ingredients - Option 1: Material Ingredient Reporting
- MR Credit: Building Product Disclosure and Optimization
- Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)
- EQ Credit: Low Emitting Materials
- Option 1: Product Category Calculations
- Health Product Declaration (HPD) | 100 Ppm Disclosure
- 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
- FloorScore® Certified

Installation Guidelines










Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

| | | | | | |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Rest 94121 V3 - Moderate Variation | Hearth 94140 V4 - Substantial Variation | Inhabit 94155 V4 - Substantial Variation | Dwelling 94250 V2 - Slight Variation | Abode 94506 V4 - Substantial Variation | Contentment 94564 V3 - Moderate Variation |
|  |  |  |  |  |  |
| Pause 94580 V2 - Slight Variation | Solace 94700 V2 - Slight Variation | Shelter 94710 V2 - Slight Variation | Assurance 94730 V2 - Slight Variation | Retreat 94740 V3 - Moderate Variation | Fulfill 94790 V3 - Moderate Variation |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

