

Basis


Collection	Mineralfloor	
Style Number	4339V	
Construction	Rigid Mineral Core With Inline Level Edge Profile	
Class / ASTM F3261	Class I, Type B	
	U.s.	Metric
Nominal Dimensions	12 in w x 23 in l	30 cm w x 60 cm l
Actual Dimensions	11.73 in w x 23.46 in l	29.79 cm w x 59.59 cm l
Overall Thickness	0.236 in	6 mm
Edge Profile	Bevel	
Installation Type	InLine Level Edge	
Installation	Direct Glue	
Recommended Adhesive	3 in 1 Ultra Rigid Mineral Core 4 Gallon	

Packaging

Pieces Per Carton	12 pcs	
Area Per Carton	22.94 sq ft	2.13 sq m
Weight Per Carton	40.34 lbs	18.3 kg



Recommended Installation Method

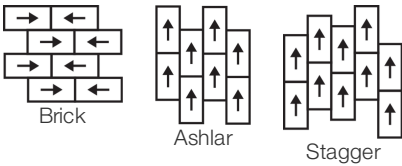

Coordinating Products

Rigid Core: Origin

Performance + Testing

Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662, Flaming Mode)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
coefficient of friction (ASTM D2407, slip resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.	

Warranties

15 Year Commercial Limited

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Certified
Climate Impact	
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	Country of Origin China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	Absence of Halogenated Flame Retardants
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore Certificate

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	FloorScore® Certified
EQ Credit: Low Emitting Materials	
Option 1: Product Category Calculations	

Installation Guidelines


Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways




Formation 39155
V2 - Slight Variation




Elaborate 39504
V2 - Slight Variation



Intrinsic 39520
V2 - Slight Variation




Configuration 39530
V2 - Slight Variation



Actualize 39535
V2 - Slight Variation



Matrix 39585
V2 - Slight Variation




Source 39595
V2 - Slight Variation

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation

