

Nordic 2.5

Numéro Du Style	4446V	
Type De Produit	Heavy Commercial Luxury Vinyl Tile	
Collection	Nordic	
Construction	Standard	Données + Performance
Type of Floorcovering	EN 1307	Vinyl Tile
Classification	ISO 10874	class 33 heavy commercial use
Poids Total	EN ISO 23997	4.04 kg/m²
Epaisseur Du Velours	EN ISO 24346	2.5 mm
Dimensions	EN 994	18.42 cm x 121.92 cm 16 tiles (3.59 sq m) per box
Poids Par Carton		15.61 kg




Performance


Inflamabilité	EN 13501-1	Bfl-S1 (unadhered testing)
Résistance Thermique m ² K/w	ISO 8302	0.013 m² K/W
Propension Électrostatique	EN 1815	≤ 2.0 kV (stroll test)
Capacités Antidérapantes	BS 7976-2	PTV Dry 46 PTV Wet 32 (pendulum)
	DIN 51130	R10 (shod ramp)
Stabilité Dimensionnelle	EN ISO 23999	≤0.15%
Chaise À Roulette	EN 425, ISO 4918	no damage
Impact Sound Reduction	BS EN ISO 10140	ΔLw 4dB/21dB with 2mm underlay
Absorption Acoustique	ISO 354	0.013 m² K/W
Résistance De La Couleur À La Lumière	BS EN ISO 105-BO2	7
Émissions	ISO 16000	Yes

Limitée Commerciale De 15 Ans subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Méthodes d'Installation Conseillées

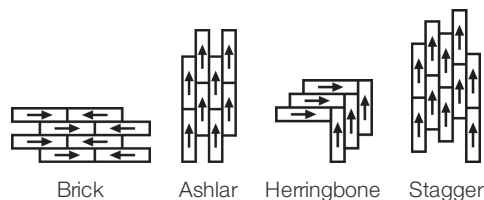


colour and visual variation index

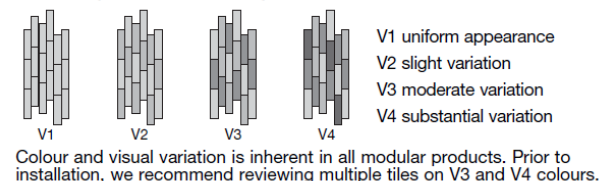






Coordination Des Produits

LVT: Nordic 5.0



ΔLw 4dB/21dB with 2mm underlay

 22 EU.DOP/1658/CPR/1222/1222/LVT SHAW EUROPE LIMITED VAARTWEG 10, 4905 BL NETHERLANDS (NLD) Notified Body 1658	 22 UK.DOP/0321/CPR/1222/1222/LVT SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM Approved Body 1658	
 E1 HCHO	 Bfl-s1	 Lightning bolt
For use as an indoor floor covering as specified by the manufacturer		

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company
April 11, 2025

Transparence du produit

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributs + Certifications

FloorScore®	Certifié
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
pays d'origine	Chine

Contribution À La Certification Leed

"Crédit EQ : matériaux faibles émissions Option 1 : calculs par catégorie de produit"	FloorScore Certified
Installation Guidelines Maintenance Guidelines	Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. Visit shawcontract.com/testing for more information.

Indice De Réflexion Lumineuse

 Honey 77103 LRV 26.8 L* 58.83 V2 - Slight Variation	 Alder 77104 LRV 25.5 L* 57.57 V3 - Moderate Variation	 Blonde 77112 LRV 37.6 L* 67.73 V2 - Slight Variation	 Driftwood 77120 LRV 30.6 L* 62.16 V3 - Moderate Variation	 Birch 77140 LRV 35.8 L* 66.35 V2 - Slight Variation	 Fir 77155 LRV 42 L* 70.85 V2 - Slight Variation
 Radiant 77710 LRV 21.1 L* 53.08 V2 - Slight Variation	 Redwood 77720 LRV 22 L* 54.07 V2 - Slight Variation	 Elm 77721 LRV 22.7 L* 54.81 V2 - Slight Variation	 Golden 77756 LRV 15.2 L* 45.94 V3 - Moderate Variation		

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
---	--	---	--

