

Fragmented 12 X 24 Matte

Style Number	CT84J
Composition	Porcelain
Tile Type	Floor
Body Type	Unglazed Color Body Porcelain
Finish	Matte
Nominal Dimensions	12" x 23" 30 cm x 60 cm
Actual Dimensions	11.69" x 23.46" 29.7 cm x 59.6 cm
Overall Thickness	0.354" 9 mm
Edge Profile	Rectified
Country Of Origin	United States
Installation Area	Walls, Floors

Packaging

Pieces per Carton	7
Area per Carton	13.56 sq ft 1.26 sq m
Weight per Carton	56.96 lbs 25.83 kg


Performance + Testing

Shade Variation	V2
Breaking Strength (ASTM C648)	≥ 250 lbs
Water Absorption (ASTM C373) %	≤ 0.50% (Impervious (Porcelain))
DCOF	≥ 0.42
Scratch Hardness (ASTM MOHS)	7

Warranties

1 Year Commercial Limited Warranty

Available Colorways

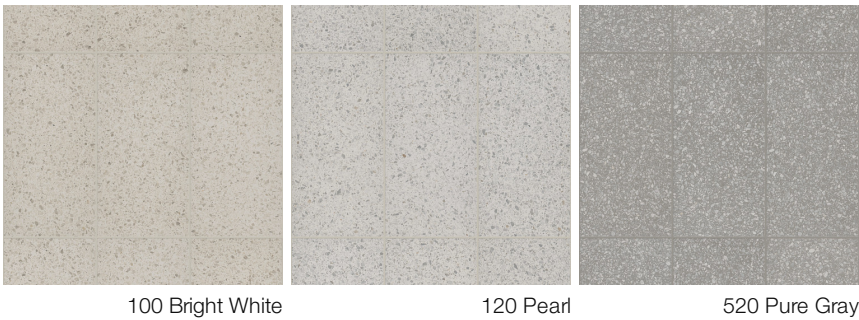

100 Bright White

120 Pearl

520 Pure Gray



Additional Information

Per ANSI A326.3, a DCOF of ≥ 0.42 is recommended for tiles in commercial applications. Tiles with a DCOF < 0.42 are not recommended for wet or slippery areas. Contaminants like water, oil, or grease can increase slip risk—use caution when selecting products for such environments. For approved Areas of Application, please reference the chart above. For more information, visit www.tcnatile.com.

Not for use on ramps.

Due to natural variation in ceramic and porcelain tile, final selection should be based on actual product samples.

[Ceramic Porcelain Step By Step Installation](#)

[Maintenance Guidelines](#)

